



DIPSTICKS 12x12 mm

Mod. 950



APPLICATION

Ridart dipsticks are used for checking the level of liquids in the tank.
They are made of black anodized aluminum with the brass cap (only on request in nylon).
We produce different sizes, specified in the table below, in bored section and solid section versions.

CHEMICAL SUITABILITY

- Anodized Aluminium Standard model is for traditional fuel without additives.



CE Ex II 2 G

BORED SECTION *

CODE	A	B
094690	160	250
094780	200	300
094710	260	350
094720	300	400
094725	360	450
094730	400	500

SOLID SECTION **


CODE	A	B
094735	160	250
094740	200	300
094680	260	350
094745	300	400
094755	360	450

DIPSTICKS:

Dimension: 12x12 mm

Value A : marked height

Value B : total lenght dipstick

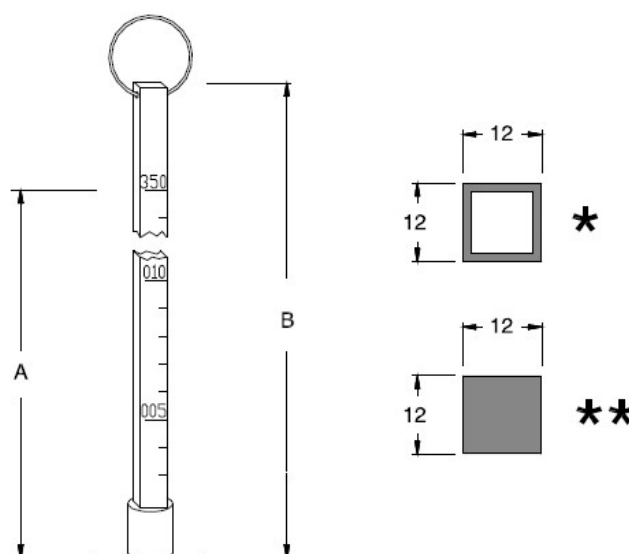

APPLICATION

- For correct use follow the Directives and product User Manual.
- Contact our technical department for custom application or maintenance by email to: quality@ridart.it.
- Product Certification, Declaration of Conformity and User Manuals are available on: www.ridart.it/support.

MAINTENANCE

- Periodically check the dipstick.
- Always replace the product after fire or deflagration.
- In case of tampering warranty expires and safety protection is not guaranteed.

RIDART s.r.l. via Adua, 17 - 21045 Gazzada Schianno (VA) ITALY P.IVA/C.F. IT 01454770122

www.ridart.it info@ridart.it +39 0332 463301

Product Certification, Declaration of Conformity, User Manual and Testing on: www.ridart.it/support

The Data and Images are not binding. We reserve the right to make changes without notice. Pressure & Flow Tolerances $\pm 20\%$.