



Double Poppet Foot valve

Mod. 10



APPLICATION

It's a device in according with Directive 2014/34/EU and harmonized standard EN ISO 13617-2.
The double poppet foot valve is designed to prevent the back flow of liquid on the suction line allowing the flow only in one direction.
The presence of two poppets ensures better sealing of the fluid and long service life of the valve.

CHEMICAL SUITABILITY

- Standard model (BRASS) is for traditional fuel without additives.


BODY	BRASS
LOWER POPPET SEAL	VITON®
UPPER POPPET SEAL	METAL
OPENING PRESSURE	10 mbar
THREAD	BSPP ISO 228-1



CE Ex II 2 G

DIMENSIONS

CODE	DN1	A	B	C	Weight, kg
086040	1" BSPP F	120	49	14	0,6
086060	1"1/2 BSPP F	134	68	14	1,2
086070	2" BSPP F	180	90	19	2,3
086080	2"1/2 BSPP F	180	90	19	2,3
086090	3" BSPP F	218	124	20	4,4
085990	4" BSPP F	308	160	23	8,0
085991	4" NPT	165	160	28	8,0
10-150-WA	6" BSPP F	506	210	25	14

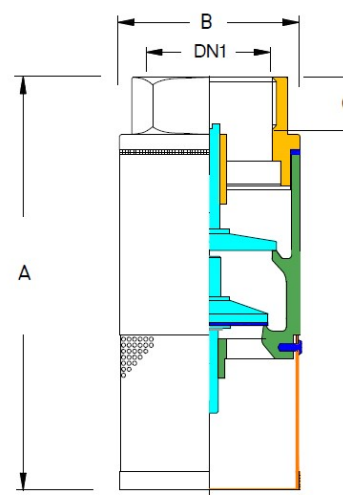

INSTALLATION

- The foot valve is normally installed at the bottom of the suction line of the storage tank in such a way in order to always ensure the pressure in the suction tube.
- For correct installation follow the Directives and product User Manual.
- For custom application or maintenance write to: quality@ridart.it.
- Declaration of Conformity and User Manual are available on: www.ridart.it/support

MAINTENANCE

- Periodically check the device is necessary to remove possible dirty.
- Always replace the product after fire, deflagration, brake or damage.
- In case of tampering warranty expires and safety protection is not guaranteed.

RIDART s.r.l. via Adua, 17 - 21045 Gazzada Schianno (VA) ITALY P.IVA/C.F. IT 01454770122

www.ridart.it info@ridart.it +39 0332 463301

Product Certification, Declaration of Conformity, User Manual and Testing on: www.ridart.it/support
The Data and Images are not binding. We reserve the right to make changes without notice. Pressure & Flow Tolerances $\pm 20\%$.